

- 1 GPON port
- 4 LAN Gigabit Ethernet ports
- USB 2.0 for network drive or printer connection
- Dual-band Wi-Fi (802.11a/b/g/n/ac)
- Wi-Fi EasyMesh
- Smart Home controller¹



NTU series ONTs are high performance subscriber terminals designed to access modern IPTV, OTT and Internet services. NTU-RG series terminals enable providers to offer users a wide range of services and local network features.

PON technology

PON technology is one of the most modern and effective last mile problem solutions. The technology helps to reduce costs for cable infrastructure and providing data rates of up to 2.5 Gbps in downlink and 1.25 Gbps in uplink direction. The use of PON technology in access networks allows providing end users with access to IP-based services.

Universal devices

The integrated gigabit router with four 10/100/1000BASE-T ports ensures high-speed connection of network devices. The USB port can be used for USB devices (USB flash drive, external HDD, printer).

Provided services

- High-speed access to Internet
- Video streaming/High Definition TV/IPTV, video on demand (VoD), video conferences
- Online entertainment and educational programmes
- Smart Home control¹

Application

- Providing broadband access services to subscribers in apartment blocks, residential estates, campuses and suburban settlements
- Building corporate networks in large strategic enterprises and in business centers with high requirements to security and data transfer rates

Smart home controller¹

The device includes a Smart Home controller that supports Z-Wave radio communication with sensors and devices.

Advantages of EasyMesh technology

- Network intelligence: a self-organizing and self-optimizing network collects information and responds to network conditions for maximum performance.
- Efficient load balancing: allows devices to switch to a better connection and avoid interference.
- Scalability: allows adding multi-vendor Wi-Fi EasyMesh access points

Wireless connection

NTU-RG-5420G-Wac and NTU-RG-5420G-WZ ONTs support the 802.11ac standard that provides data rates up to 866 Mbps and delivers modern high-speed services to subscriber equipment via the wireless network.

Two integrated Wi-Fi controllers ensure simultaneous dual-band operation in 2.4 GHz and 5 GHz.

ONT NTU interfaces configuration

	WAN	LAN	Wi-Fi	USB	Smart Home interface
NTU-RG-5420G-Wac	1xGPON	4x1G	802.11n, 2*2 – 300 Mbps – 2.4 GHz 802.11ac, 2*2 – 866 Mbps – 5 GHz	1xUSB 2.0	no
NTU-RG-5420G-WZ	1xGPON	4x1G	802.11n, 2*2 – 300 Mbps – 2.4 GHz 802.11ac, 2*2 – 866 Mbps – 5 GHz	1xUSB 2.0	yes

¹ For NTU-RG-5420G-WZ.

Features and capabilities

PON interface parameters

- 1 GPON port
- Compliance with ITU-T G.984.2, ITU-T G.984.5 Filter, FSAN Class B+, SFF-8472
- SC/APC connector type
- Transmission media: SMF 9/125 fiber-optic cable, G.652
- Maximum operating distance: 20 km
- Transmitter: 1310 nm DFB Pulse Mode Output Transmitter
 - Data rate: 1244 Mbps
 - Output power: +0,5..+5 dBm
 - Spectral line width: 1 nm (-20 dB)
- Receiver: 1490 nm APD/TIA CW Mode Digital Receiver
 - Data rate: 2488 Mbps
 - Receiver sensitivity: -28 dBm, BER≤1.0x10⁻¹⁰
 - Receiver optical overload: -8 dBm

LAN interface parameters

- 4 x Ethernet 10/100/1000BASE-T (RJ-45) ports

Wireless interface parameters

- 802.11a/b/g/n/ac
- Frequency range 2400–2483.5 MHz, 5150–5350 MHz, 5650–5850 MHz
- EasyMesh
- Simultaneous Dual Band
- CCK, BPSK, QPSK, 16 QAM, 64 QAM, 256 QAM modulation

Operating channels

- 802.11b/g/n: 1-13
- 802.11a/n/ac: 36-64, 132-165

Data rate¹

- 802.11b: 1; 2; 5,5 and 11 Mbps
- 802.11g: 6, 9, 12, 18, 24, 36, 48 and 54 Mbps
- 802.11n: 300 Mbps (20 MHz channel)
- 802.11ac: 866 Mbps (80 MHz channel)

Maximum power of the transmitter²

- 802.11b (11 Mbps): 17 dBm
- 802.11g (54 Mbps): 15 dBm
- 802.11n (MCS7): 15 dBm
- 802.11ac (MCS0): 19 dBm

USB interface parameters

- 1 x USB 2.0

Smart home interface³

- Radio interface for “Smart home” system control

Physical specifications

- Dimensions (WxHxD): 234x34x133 mm, desktop case, wall mounting option
- Power supply via 12 V DC, 1.5 A power adapter
- Maximum power consumption: 18 W
- Operating temperature: from +5 to +40 °C
- Relative humidity: up to 80%

Functional specifications

- TR-069
- Bridge and router (including virtual ones) operation modes
- PPPoE (auto, PAP, MSCHAP and CHAP authorization)
- IPoE (DHCP-client and static)
- DHCP server on LAN side
- Multicast traffic transmission via Wi-Fi
- DNS (Domain Name System)
- DynDNS (Dynamic DNS)
- UPnP (Universal Plug and Play)
- NAT (Network Address Translation)
- NTP (Network Time Protocol)
- Quality of Service (QoS)
- IGMP Snooping
- IGMP Proxy
- UPnP, SMB, FTP/FTP-alg, Print Server
- VLAN compliance with IEEE 802.1Q
- Support for VPN in L2TP mode
- L2TP over IPSec

Security features

- Rate limiting on ports
- FEC coding

Configuration and monitoring

- According to TR-142:
 - Remote management via OMCI
 - Remote management via TR-069
- Local management via web
- Firmware updating via OMCI, TR-069, HTTP, TFTP

Standards


- ITU-T G.984.x — GPON
- ITU-T G.988 OMCI specification
- IEEE 802.1D
- IEEE 802.1Q
- IEEE 802.1P

¹ The maximum wireless transmission data rate depends on the IEEE 802.11n/ac standard. The real bandwidth can be different. Network operation conditions, environment, traffic volume, building materials and constructions as well as network service data can decrease the real bandwidth and reduce the network coverage radius.


² The maximum output power will vary according to the rules of radio frequency regulation in your country.

³ For NTU-RG-5420G-WZ.


Use case

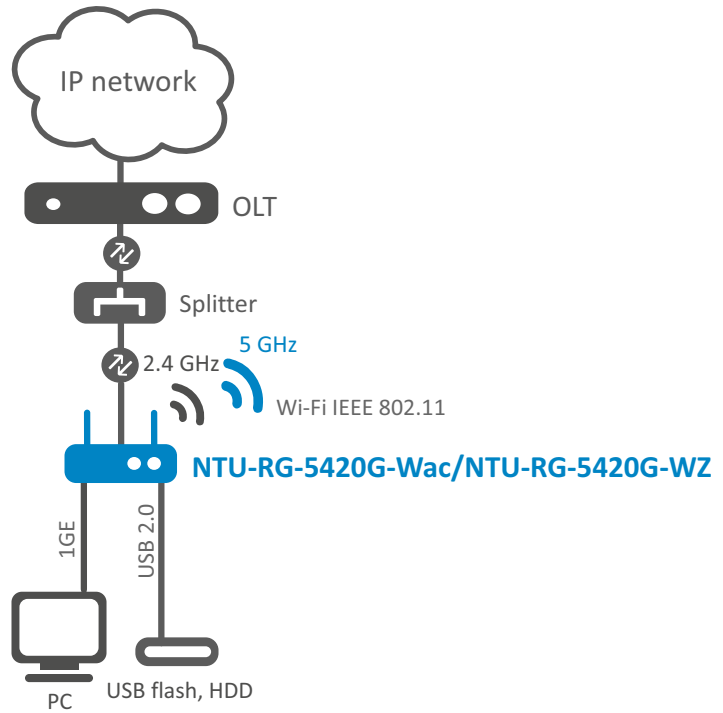

EasyMesh technology application scheme

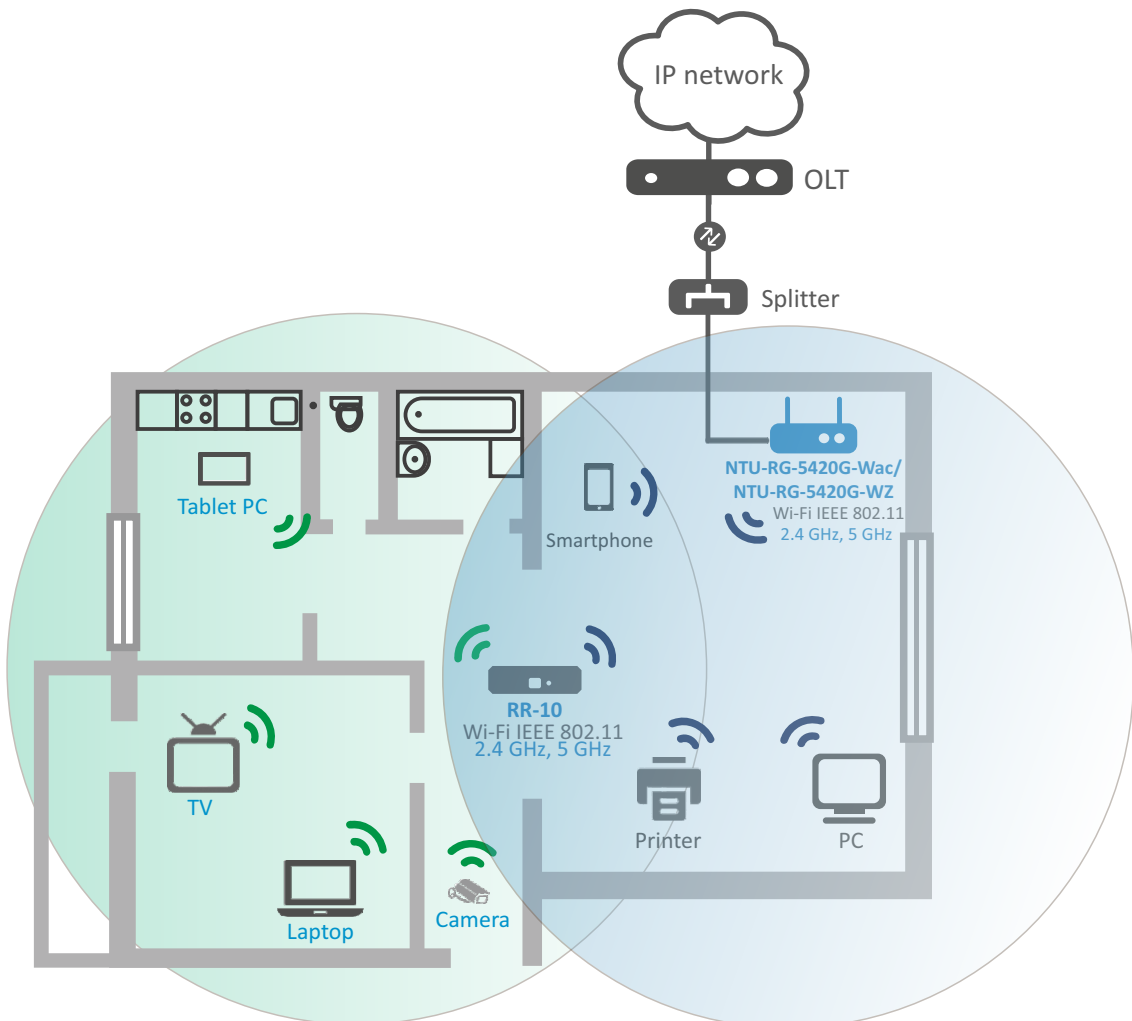

Smart home technology application scheme for NTU-RG-5420G-WZ

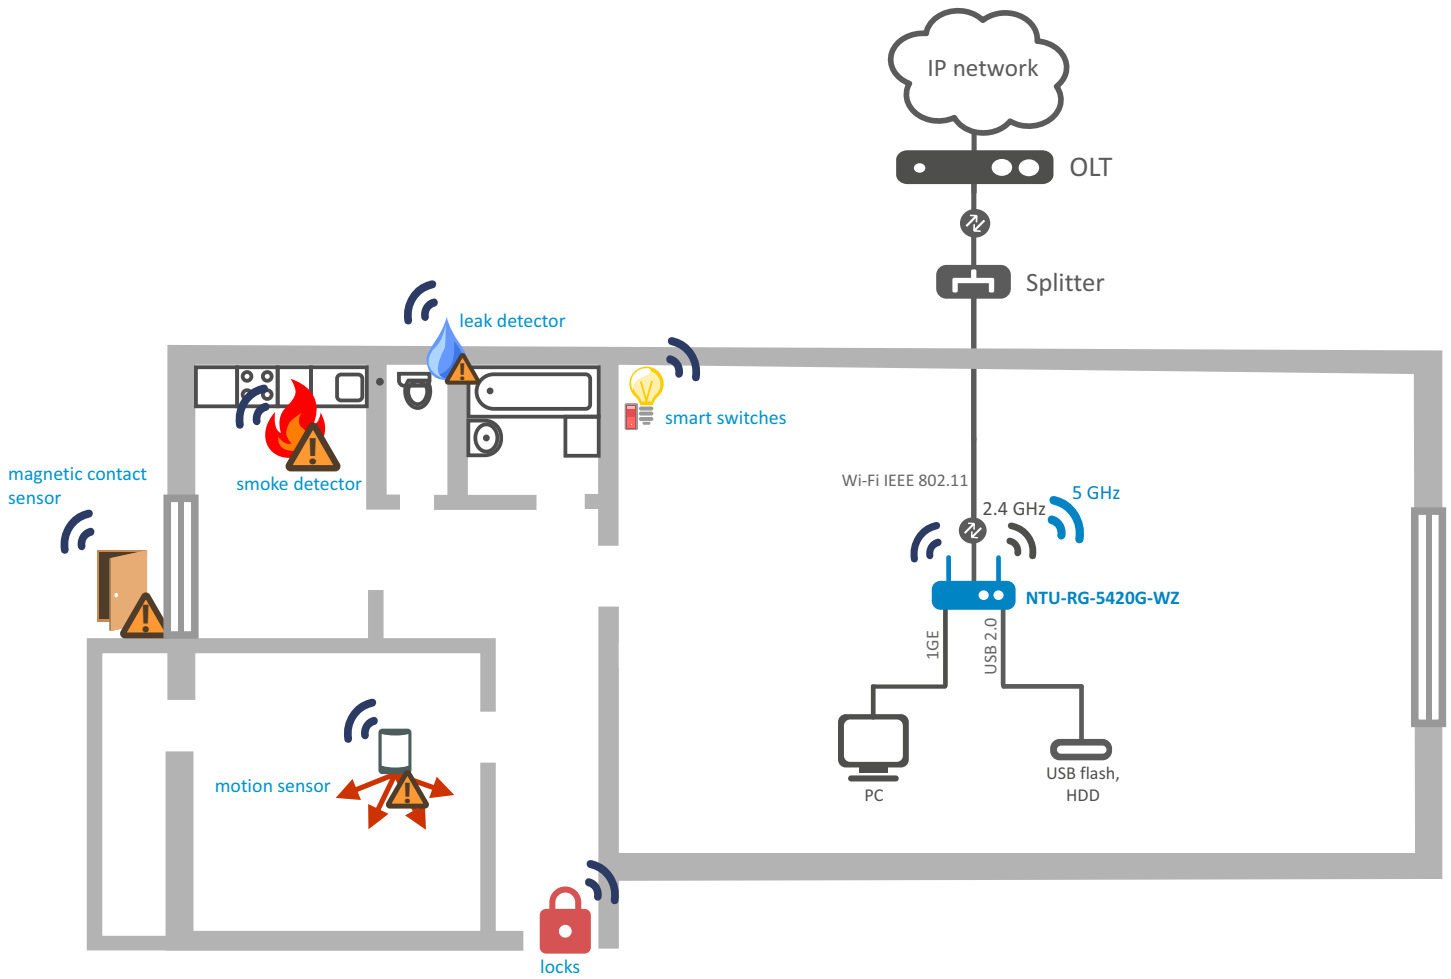

Ordering information

Name	Description
NTU-RG-5420G-Wac	ONT NTU-RG-5420G-Wac, 1 GPON port, 4 LAN 10/100/1000BASE-T ports, 1xUSB, Wi-Fi (802.11n, 2*2 — 300 Mbps — 2.4 GHz + 802.11ac, 2*2 — 866 Mbps — 5 GHz)
NTU-RG-5420G-WZ	ONT NTU-RG-5420G-WZ, 1 GPON port, 4 LAN 10/100/1000BASE-T ports, 1xUSB, Wi-Fi (802.11n, 2*2 — 300 Mbps — 2.4 GHz + 802.11ac, 2*2 — 866 Mbps — 5 GHz), Smart Home interface

Related software

ACS-CPE-512	ACS-CPE-512 option of Eltex.ACS system for Eltex CPE autoconfiguration: 512 subscriber devices
ACS-CPE-1024	ACS-CPE-1024 option of Eltex.ACS system for Eltex CPE autoconfiguration: 1024 subscriber devices

Contact us

+7 (383) 274 10 01
+7 (383) 274 48 48

eltex@eltex-co.ru

www.eltex-co.com

About ELTEX

ELTEX Enterprise is a leading Russian developer and manufacturer of communications equipment with 30 years of history. Complete solutions and their seamless integrability into the Customer's infrastructure are the priority growth areas of the company.