

- Dual band access point
- Support for 802.11ac
- Radio interface with MIMO 2×2 support
- PoE power supply (IEEE 802.3af-2003)
- Up-to-date authentication and encryption means



All-weather access point

The WOP-20L wireless access point provides easy and secure access to a high-performance wireless network that combines numerous features and services necessary for convenient network access in crowded areas.

With high speed, low latency, energy efficiency, increased bandwidth and extended range, new access points provide many additional services, compared to access points of the previous Wi-Fi standards.

The device is an indispensable solution for organizing a wireless network in various climatic conditions, in a wide range of operating temperatures and high humidity (parks, factories, stadiums, etc.), and is also an ideal platform for organizing communication in suburban settlements and remote locations.

Scalability

WOP-20L is an up-to-date flexible solution that allows changing the network coverage in order to increase the quantity of serviced mobile devices. Due to high performance hardware platform, scalability features and easy-to-use interface, it is possible to set up IT infrastructure simply and fast.

Wireless connection

Due to support for IEEE 802.11n/ac standards the WOP-20L access point provides up to 300 Mbps (at 2.4 GHz) and up to 867 Mbps (at 5 GHz) data rates.

The use of MIMO technology and omnidirectional antennas makes WOP-20L a universal solution for corporate networks construction.

Security

Up-to-date authentication technologies are provided to ensure a secure connection. In particular, a dynamic key is used, which is unique for each subscriber device connected to WOP-20L.


Performance

To ensure stable and uninterrupted operation of the device, high-performance processors are used, providing reliability and high data processing rates.

Power

The PoE technology makes it possible to install equipment in any place, regardless of the power supply source location. That reduces total cost by discarding power cables and makes installation easier and faster.

Application diagram

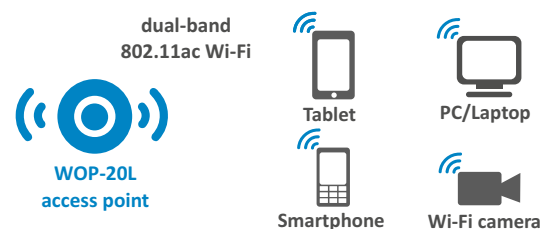

Interfaces configuration

Ethernet	Wi-Fi	SMA connectors for antennas
1×1G	802.11a/b/g/n/ac	4

Features and capabilities

Interfaces

- 1 port of 10/100/1000BASE-T (RJ-45) with PoE support
- Wi-Fi 2.4 GHz IEEE 802.11b/g/n
- Wi-Fi 5 GHz IEEE 802.11a/n/ac
- 4 SMA connectors (female) for external antennas connection (Omni, sector, panel, etc.)

WLAN capabilities

- Support for IEEE 802.11a/b/g/n/ac
- 802.11r/k/v roaming
- Data aggregation, including A-MPDU (Tx/Rx) and AMSDU (Rx)
- WMM-based packet priorities and planning
- Dynamic frequency selection (DFS)
- Support for hidden SSID
- 14 virtual access points
- External access points detection
- Spectrum analyzer
- WDS support
- APSD support

Network features

- Automatic speed negotiation, duplex mode negotiation and MDI-MDI-X switch-over
- VLAN support (Access, Trunk, General)
- DHCP client
- GRE support
- Transmission of subscriber traffic out of tunnels
- ACL support
- NTP support
- Syslog support
- IPv6 support

QoS functions

- Packet priorities and planning based on profiles
- Bandwidth limiting for each SSID

Configuration

- Remote management via Telnet, SSH
- CLI
- NETCONF
- Web interface
- SNMP

Security

- Centralized authorization via RADIUS server (802.1X WPA/WPA2 Enterprise)
- WPA/WPA2 encryption
- Captive Portal support
- Authorization via RADIUS server when logging in to the device

Wireless interface specifications

- Frequency range 2400–2483.5 MHz; 5150–5350 MHz, 5470–5850 MHz
- BPSK, QPSK, 16QAM, 64QAM, 256QAM modulations
- Support for MIMO 2×2
- Bandwidth: 20, 40 MHz for 2.4 GHz;
20, 40 and 80 MHz for 5 GHz

Operating channels¹

- 802.11b/g/n: 1–13 (2402–2482 MHz)
- 802.11a/n/ac: 36–64 (5170–5330 MHz)
100–144 (5490–5730 MHz)
149–165 (5735–5835 MHz)

Data rate²

- 802.11a: up to 54 Mbps
- 802.11b: up to 11 Mbps
- 802.11g: up to 54 Mbps
- 802.11n: up to 300 Mbps
- 802.11ac: up to 867 Mbps

Maximum power of the transmitter¹

- 2.4 GHz: 18 dBm
- 5 GHz: 20 dBm

Receiver sensitivity

- 2.4 GHz: up to -91 dBm
- 5 GHz: up to -93 dBm


Physical specifications

- Maximum power consumption: no more than 12 W
- 128 MB Flash
- 256 MB RAM
- Power supply: PoE 48 V/56 V (IEEE 802.3af-2003)
- Operating temperature: from -45 to +65 °C
- Ingress protection: IP55
- Installation on a pole/wall
- Dimensions (W × H × D): 125 × 227 × 49 mm
- Weight: 0.77 kg

¹The number of channels and the value of the maximum output power will vary according to the rules of radio frequency regulation in your country.

²The maximum wireless data rate is defined according to IEEE 802.11 standards. The real bandwidth can be different. Conditions of the network, environment, the amount of traffic, building materials and constructions and network service data can decrease the real bandwidth. The environment can influence on the network coverage range.

Application diagram

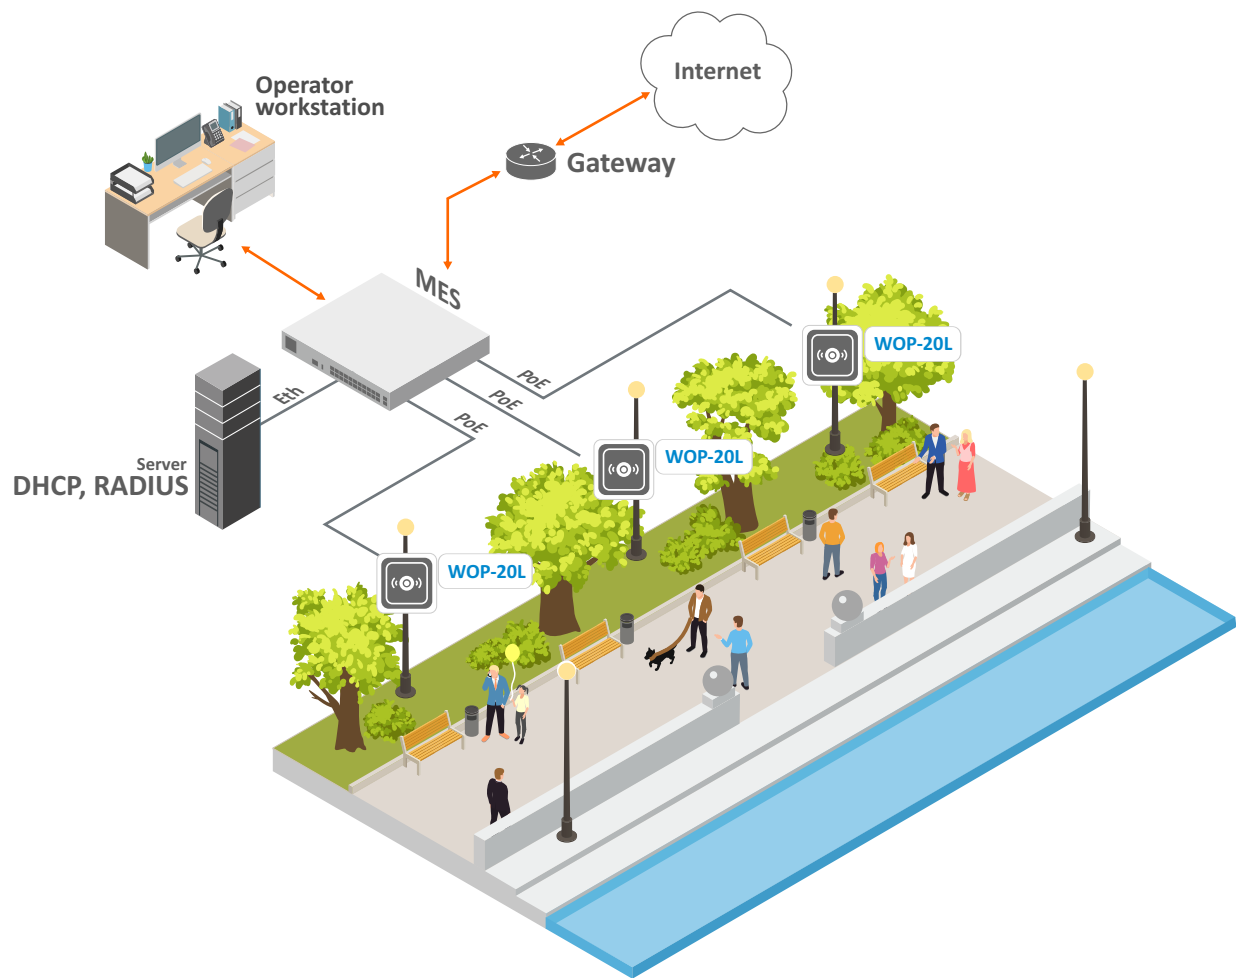

Ordering information

Name	Description
WOP-20L	WOP-20L wireless access point. Mounting kit is included

Related products


- Omnidirectional antenna: 2.4 GHz, 5 GHz
- Sector antenna: 2.4 GHz dual polarized antenna;
5 GHz dual polarized antenna
- Passive PoE 56 V power injector

Related software

Wi-Fi controller	WLC feature. Software controller with built-in AAA solution and captive portal for 1 ELTEX access point; Airtune feature for 1 Eltex access point
------------------	--

Contact us

About ELTEX


+7 (383) 274 10 01
+7 (383) 274 48 48


eltex@eltex-co.ru


www.eltex-co.com

ELTEX Enterprise is a leading Russian developer and manufacturer of communication equipment with 30 years of history. Complete solutions and their seamless integrability into the Customer's infrastructure are the priority growth areas of the company.