

- Dual core 1.15 GHz processor
- WAN Ethernet port 2.5 Gbps
- LAN Ethernet port 1 Gbps
- Dual-band Wi-Fi with speeds up to 1774.5 Mbps
- 2x2 MU MIMO
- TR-069
- Guest Wi-Fi (Multi-SSID)
- Customization
- AX1800 Wi-Fi class
- Wi-Fi a/b/g/n/ac/ax
- Wi-Fi EasyMesh (802.11 k/v)¹
- Smart home (Zigbee², Z-Wave³)



RG-5520G-Wax/RG-5520G-Wax-Z



RG-5520G-Wax rev.B/RG-5520G-Wax-Z rev.B

RG-5520G-Wax/Wax-Z — dual band Wi-Fi router with GbE LAN ports and 2.5 GbE WAN port with a high-performance dual core processor. The device supports the 802.11ax standard which simultaneously works with two streams delivering rates of up to 1.201 Gbps on the 5 GHz band. The MU MIMO technology makes the device a universal solution for enterprise networking.

Simplified administration

Centralized configuration uploading, intelligent update of firmware and collection of data on the statuses of subscriber devices are implemented in the ELTEX.ACS system based on the TR-069 protocol. The system provides simplicity of ELTEX CPE management and decreases operating expenses (OPEX) for network maintenance.

Customization

The following means of customization are available: case color changing, logo placement, package extension and other options on request.

Advantages of EasyMesh technology¹

- Network intelligence: a self-organizing and self-optimizing network collects information and responds to network conditions for maximum performance.
- Efficient load balancing: allows devices to switch to a better connection and avoid interference.
- Scalability: allows adding multi-vendor Wi-Fi EasyMesh access points.

Smart home hub

The devices include “Smart home” hubs that support the operation with sensors and devices by the following protocols:

- Zigbee² (via external USB adapter);
- Z-Wave³, (via embedded module).

¹ Will be available in future firmware versions.

² Supported via SONOFF Zigbee 3.0 USB Dongle Plus-E external USB adapter.

³ For RG-5520G-Wax-Z.

Interface configuration

	RG-5520G-Wax	RG-5520G-Wax-Z
WAN	1 x 2.5G	1 x 2.5G
LAN	4 x 1G	4 x 1G
USB	1 x USB 2.0	1 x USB 2.0
Wi-Fi	a/b/g/n/ac/ax	a/b/g/n/ac/ax
“Smart Home” management interface ¹	no	yes

Features and capabilities

Main technical parameters

- RAM 256 MB
- Flash 128 MB

Interfaces

- 1 x WAN 10/100/1000/2500BASE-T (RJ-45)
- 4 x LAN 10/100/1000BASE-T (RJ-45)
- Wi-Fi 2.4 GHz b/g/n/ax
- Wi-Fi 5 GHz a/n/ac/ax
- 1 x USB 2.0
- “Smart Home” management interface¹

Network features

- MultiWAN
- QoS
- NAT
- Port forwarding
- DMZ
- ALG (FTP, TFTP, H323, SIP, PPTP)
- IP Passthrough
- Router/bridge mode operation
- DHCP server on the LAN side
- Firewall
- Static and dynamic routing
- Dynamic DNS
- Multiservice model: separate network parameters configuration per service: Internet, TR-069, IPTV
- UPnP
- IGMP Snooping
- IGMP Proxy
- MLD Snooping

- MLD Proxy
- UDP-to-HTTP Proxy
- Time synchronization via NTP
- Restriction of the access to the device via WAN and LAN
- SSH
- Telnet
- Jumbo Frame (up to 9200 bytes)
- IPv4, IPv6
- 3G/4G modems
- FTP, Samba, DLNA

Connection types

- Static IP address
- DHCP
- PPPoE
- L2TP
- PPTP

Wireless interface parameters

- EasyMesh (IEEE 802.11k/v)¹
- WPA/WPA2/WPA3 encryption standards
- Frequency range:
 - 2402–2482 MHz
 - 5170–5330 MHz
 - 5650–5835 MHz
- MIMO:
 - 2.4 GHz: 2x2 MU MIMO
 - 5 GHz: 2x2 MU MIMO
- Maximum power of the transmitter:
 - 2.4 GHz: 21 dBm
 - 5 GHz: 22 dBm

¹ Management via integrated Z-Wave module is only available for RG-5520G-Wax-Z. Management via external USB adapter SONOFF Zigbee 3.0 USB Dongle Plus-E is optionally available for RG-5520G-Wax/RG-5520G-Wax-Z.

Features and capabilities (continued)

- Antenna gain:
 - 2.4 GHz: 2×3 dBi
 - 5 GHz: 2×4 dBi
- Receiver sensitivity:
 - 2.4 GHz: up to -94 dBm
 - 5 GHz: up to -95 dBm
- Data rate:
 - 2.4 GHz: up to 573.5 Mbps (HE40_MCS11)
 - 5 GHz: up to 1201 Mbps (HE80_MCS11)


Management and diagnostics

- Web interface
- TR-069
- SSH
- Telnet

Physical specifications


- Power supply via 12 V DC, 2 A
- Maximum power consumption: 16 W
- Operating temperature range: from +5 to +40 °C
- Relative humidity at 25 °C: up to 80 %
- Dimensions (W × H × D):
 - RG-5520G-Wax/RG-5520G-Wax-Z — 234 × 36 × 135 mm
 - RG-5520G-Wax rev.B/RG-5520G-Wax-Z rev.B — 230 × 35 × 138 mm
- Weight:
 - RG-5520G-Wax/RG-5520G-Wax-Z — 0.355 kg
 - RG-5520G-Wax rev.B/RG-5520G-Wax-Z rev.B — 0.359 kg

Use case

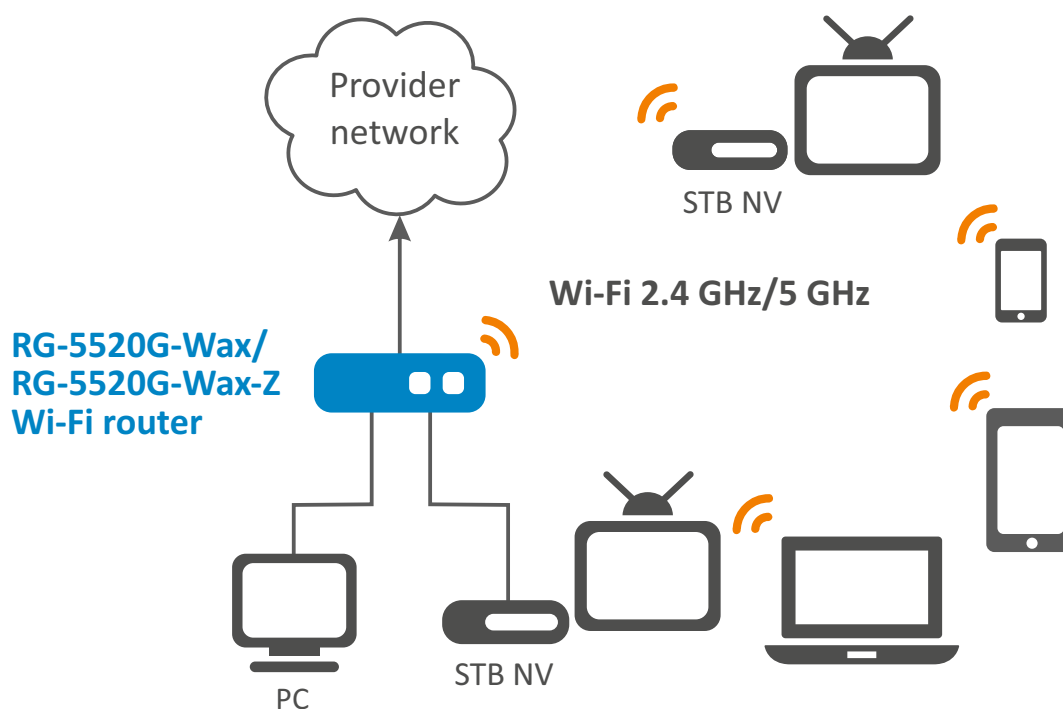

¹ Will be available in future firmware versions.

Wi-Fi Easymesh solution scheme¹

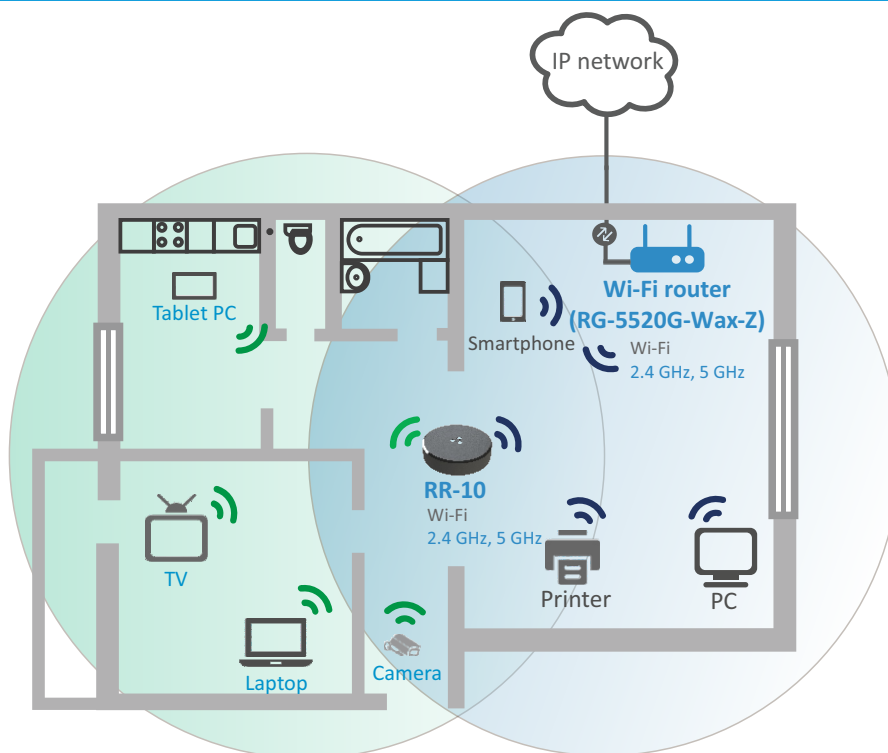


Ordering information

Name	Description
RG-5520G-Wax	RG-5520G-Wax Wi-Fi router: 1 × WAN, 4 × LAN, 1 × USB, Wi-Fi 802.11a/b/g/n/ac/ax
RG-5520G-Wax-Z	RG-5520G-Wax-Z Wi-Fi router with smart home hub Eltex Home: 1 × WAN, 4 × LAN, 1 × USB, Wi-Fi 802.11a/b/g/n/ac/ax, “Smart home” management interface ²
Related products	
RR-10	Wireless signal repeater
RR-11	Wireless signal repeater
Related software	
ACS-CPE	ACS-CPE option of ELTEX.ACS system for ELTEX CPE autoconfiguration: 256/512/1024 subscriber devices

¹ Will be available in future firmware versions.

² Management via integrated Z-Wave module is only available for RG-5520G-Wax-Z. Management via external USB adapter SONOFF Zigbee 3.0 USB Dongle Plus-E is optionally available for RG-5520G-Wax/RG-5520G-Wax-Z.

Contact us



+7 (383) 274 10 01
+7 (383) 274 48 48



eltex@eltex-co.ru



www.eltex-co.com

About ELTEX

ELTEX Enterprise is a leading Russian developer and manufacturer of communication equipment with 30 years of history. Complete solutions and their seamless integrability into the Customer's infrastructure are the priority growth areas of the company.