

- Dual band access point
- Support for 802.11ax
- Radio interface with MU-MIMO 2x2 support
- PoE+ power supply (IEEE 802.3at-2009)
- Up-to-date authentication and encryption means



### All-weather access point

WOP-30L, a next-generation Wi-Fi 6 access point, provides a high-speed and secure wireless network, that combines many features and services needed for comfortable access in crowded places. With high speed, low latency, energy efficiency, increased bandwidth and extended range, new access points will be able to provide many additional services.

WOP-30L is an indispensable solution for organizing a wireless network in various climatic conditions, in a wide range of operating temperatures and high humidity (parks, factories, stadiums, etc.), and is also an ideal platform for organizing communications in cottage settlements and remote settlements.

### Scalability

The WOP-30L wireless access point is the latest flexible solution that allows changing the network coverage area, thereby increasing the number of mobile devices served. The high performance of the hardware platform, scalability and intuitive interface make it easy and quick to deploy a wireless IT infrastructure.

### Wireless connection

Due to support for IEEE 802.11ax standard the WOP-30L access point provides 574 Mbps (2.4 GHz) + 1201 Mbps (5 GHz) data rates. The use of MU-MIMO technology and omnidirectional antennas makes WOP-30L a universal solution for corporate networks construction.

### Security

For the corporate environment, modern WPA3 authentication and encryption technologies are supported, which provide personal data protection and environment security. The new generation access points meet the highest security and compatibility requirements for earlier versions of the 802.11 standard.


### Performance

The high-performance processors are used in the devices in order to provide reliability and high data processing rates.

### Power supply

The PoE+ technology makes installation of the equipment possible virtually everywhere, regardless of the power supply location. That reduces total cost by discarding power cables and makes installation easier and faster.

### Application diagram

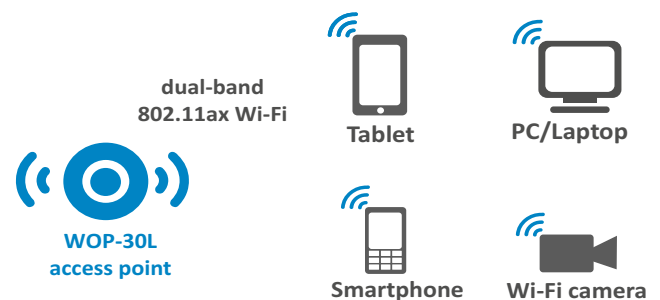

### Interface configuration

Ethernet	Wi-Fi	SMA connectors to connect antennas
1x2.5G	802.11a/b/g/n/ac/ax	4

## Features and capabilities

### Interfaces

- 1 port of 10/100/1000/2500BASE-T (RJ-45) with PoE+ support
- Wi-Fi 2.4 GHz IEEE 802.11b/g/n/ax
- Wi-Fi 5 GHz IEEE 802.11a/n/ac/ax
- 4 SMA-type connectors (female) for connecting external antennas (Omni, sector, panel, etc.)

### WLAN capabilities

- Support for IEEE 802.11a/b/g/n/ac/ax
- Support for roaming IEEE 802.11r/k/v<sup>1</sup>
- Data aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Rx)
- WMM-based packet priorities and planning
- Dynamic frequency selection (DFS)
- Support for hidden SSID
- 14 virtual access points
- Detection of access points from other vendors
- Spectrum analyzer<sup>1</sup>
- APSD

### Network features

- Automatic speed negotiation, duplex mode negotiation and MDI-MDI-X switch-over
- VLAN support (Access, Trunk, General)
- DHCP client
- GRE
- Transmission of subscriber traffic outside of tunnels
- ACL<sup>1</sup>
- NTP
- Syslog
- IPv6

### QoS functions

- Packet priorities and planning based on profiles
- Bandwidth limiting for each SSID

### Configuration

- Remote management via Telnet, SSH
- CLI
- NETCONF
- Web interface
- SNMP

### Regulatory Compliance

- CE marked:
  - EN IEC 62311:2020
  - EN IEC 62368-1:2020+A11:2020
  - EN 301 489-1 V2.2.3
  - EN 301 489-3 V2.1.1
  - EN 301 489-17 V3.2.4
  - EN 55032:2015+A1:2020
  - EN 55035:2017+A11:2020
  - EN IEC 61000-3-2:2019+A1:2021
  - EN 61000-3-3:2013+A2:2021
  - EN 300 328 V2.2.2
  - EN 301 893 V2.1.1
  - EN 300 440 V2.2.1

### Security

- Centralized authorization via RADIUS server (802.1X WPA/WPA2 Enterprise)
- WPA/WPA2/WPA3 encryption
- Captive Portal

### Wireless interface specifications

- Frequency range 2400–2483.5 MHz, 5150–5350 MHz, 5470–5850 MHz
- BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulations
- Support for MU-MIMO 2x2
- Support for OFDMA
- Bandwidth: 20, 40 MHz for 2.4 GHz  
20, 40 and 80 MHz for 5 GHz

### Operating channels<sup>2</sup>

- 802.11b/g/n/ax: 1–13 (2402–2482 MHz)
- 802.11a/n/ac/ax: 36–64 (5170–5330 MHz)  
100–144 (5490–5730 MHz)  
149–165 (5735–5835 MHz)

### Data rate<sup>3</sup>

- 2.4 GHz, 802.11ax: 574 Mbps
- 5 GHz, 802.11ax: 1201 Mbps

### Maximum power of the transmitter<sup>2</sup>

- 2.4 GHz: 20 dBm
- 5 GHz: 20 dBm

### Receiver sensitivity

- 2.4 GHz: up to -92 dBm
- 5 GHz: up to -94 dBm

### Physical specifications


- Maximum power consumption: no more than 15 W
- 128 MB SPI-NAND Flash
- 256 MB RAM
- Power supply: PoE+ 48 V/56 V (IEEE 802.3at-2009)
- Operating temperature: from -45 to +65 °C
- Ingress protection: IP55
- Pole/wall mount
- Dimensions (W × H × D): 125 × 227 × 49 mm
- Weight: 0.8 kg

<sup>1</sup>Will be fully supported in future releases.

<sup>2</sup>The number of channels and the value of the maximum output power will vary according to the rules of radio frequency regulation in your country.

<sup>3</sup>The maximum wireless data rate is defined according to IEEE 802.11 standard. The real bandwidth can be different. Conditions of the network, environment, the amount of traffic, building materials and constructions and network service data can decrease the real bandwidth. The environment can influence on the network coverage range.

### Application diagram

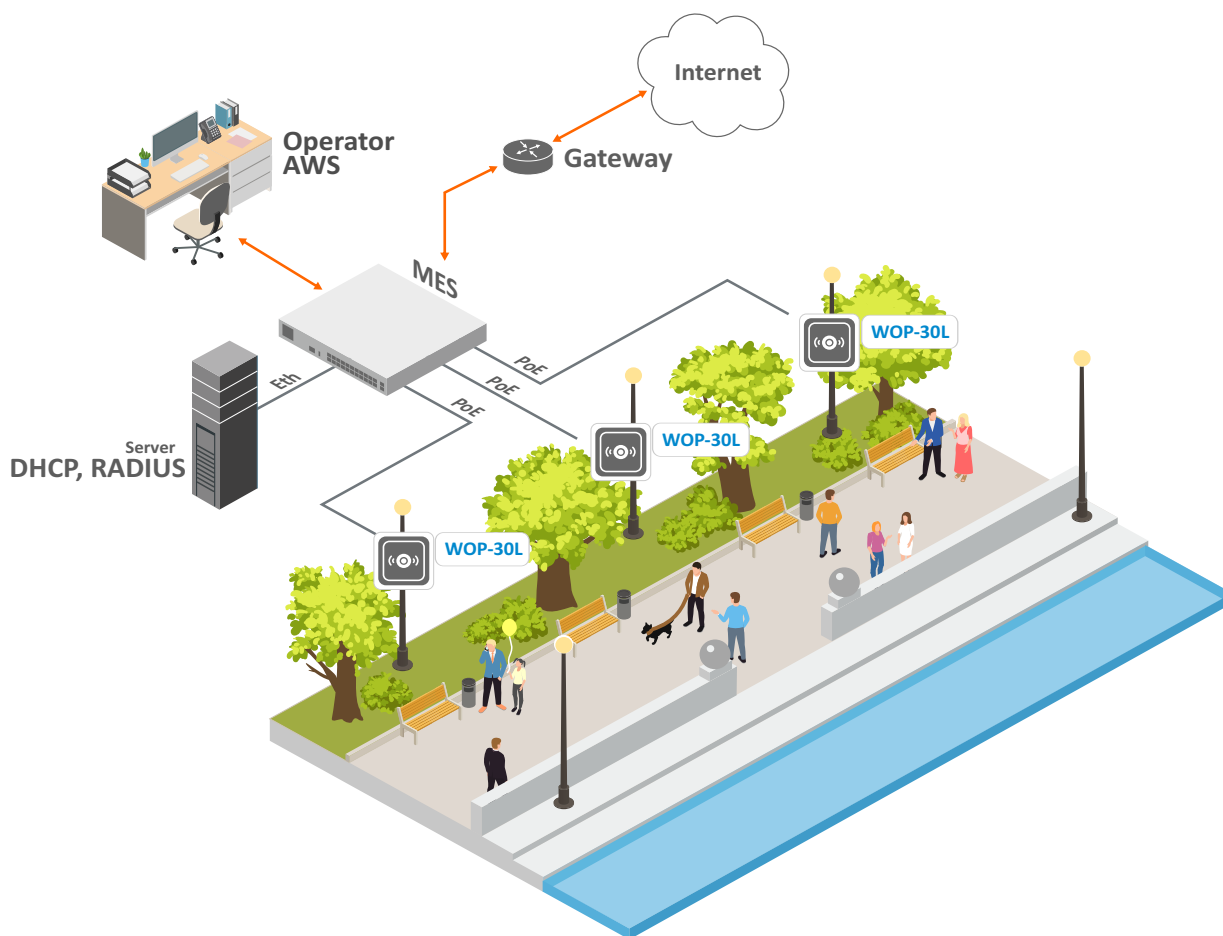

### Ordering information

Name	Description
WOP-30L	WOP-30L wireless access point. Mounting kit.

### Related products

Omnidirectional antenna: 2.4 GHz, 5 GHz.

Sector antenna: 2.4 GHz bipolar antenna;  
5 GHz bipolar antenna.

Power injector: Passive PoE 56 V.

### Related software

Wi-Fi controller	WLC feature. Software controller with built-in AAA solution and captive portal for one ELTEX access point. Airtune feature for one ELTEX access point.
------------------	---

### Contact us

+7 (383) 274 10 01  
+7 (383) 274 48 48

eltex@eltex-co.ru

www.eltex-co.com

ELTEX Enterprise is a leading Russian developer and manufacturer of communication equipment with 30 years of history. Complete solutions and their seamless integrability into the Customer's infrastructure are the priority growth areas of the company